

Indoor Tight Buffered Interconnect - Plenum

Multimode & Single Mode 2-fiber
(UL) OFNP c(UL) OFNP FT6

FEATURES & BENEFITS

- RoHS 3 compliant
- Made in U.S.A.
- 900 micron buffered design recommended for easy termination
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers
- Ideal for patch cords, interconnections, and short runs
- Easy to strip and terminate
- Lightweight, flexible aramid yarns enhance strength

OPTIONS

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2)
 - Standard jacket colors are:
 - Yellow: OS2
 - Orange: OM1
 - Aqua: OM3 & OM4
- Note: Erika Violet for OM4 is available.*

APPLICATIONS

- Applications include 10, 40 & 100 gigabit Ethernet, Fiber Channel, Video, Security, Automation

STANDARDS

- ANSI/TIA-568.3-D
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

TEMPERATURE RANGE

- **Storage Temperature**
-40° to 70°C
(-40° to 158°F)
- **Installation Temperature**
0° to 60°C
(32° to 140°F)
- **Operation Temperature**
0° to 70°C
(32° to 158°F)

DIELECTRIC MATERIALS

- **Plenum**
Overall Jacket: Flame-retardant Thermoplastic

Indoor Tight Buffered Interconnect - Plenum

Fibers	Cable O.D. inches / mm	62.5 UM OM1	50 UM OM3	50 UM OM4	8.3 UM OS2
2	0.114" / 2.9mm	60042-2	60472-2	61851-2	60044-2
zip	.079" x .170" / 2.0mm x 4.3mm	61379-2	61457-2	61986-2	61378-2
zip	.113" x .235" / 2.9mm x 6.0mm	60023-2	60502-2	61857-2	60030-2


Standard Jacket Colors



Optical Specifications TIA-568.3-D | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber Type	Max Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-hm)		Gb Ethernet Distance (m)		10 Gb Ethernet Distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

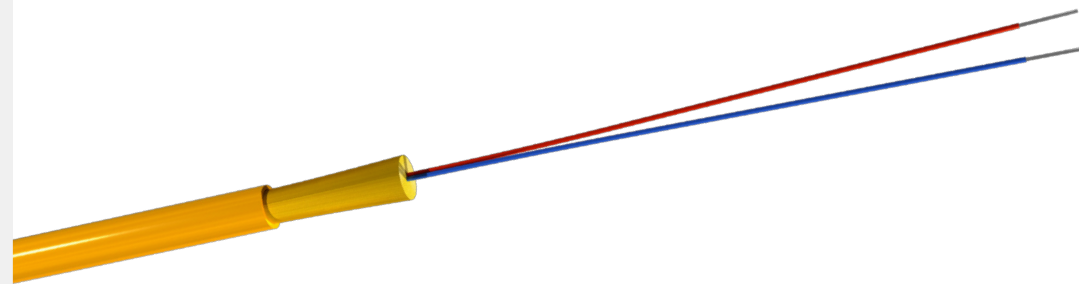

Proterial Cable America, Inc. is continuously improving the performance of our products and the accuracy of the information provided. Due to this, we reserve the right to modify, revise, correct, or change products without notice. Thank you for your understanding.



Indoor Tight Buffered Interconnect - Plenum

Multimode & Single Mode 2-fiber
(UL) OFNP c(UL) OFNP FT6

Specifications by Fiber Count

Fibers	Max Install Load Lbs.	Max Install Load Newtons	Operating Max Load Lbs	Operating Max Load Newtons	Cable Weight lbs/kft	Cable Weight Kg/Km
2	96	427	29	128	6.4	9.5
zip	96	427	48	213	6.27	9.3
zip	128	569	64	284	13.2	19.6

MECHANICAL SPECS

- Bend radius, no load = 10x cable overall diameter
- Bend radius, load = 15x cable overall diameter

ASSEMBLY DETAIL

*These cable designs utilize color-coded binders to separate subunits
DJ = Dual jacket design

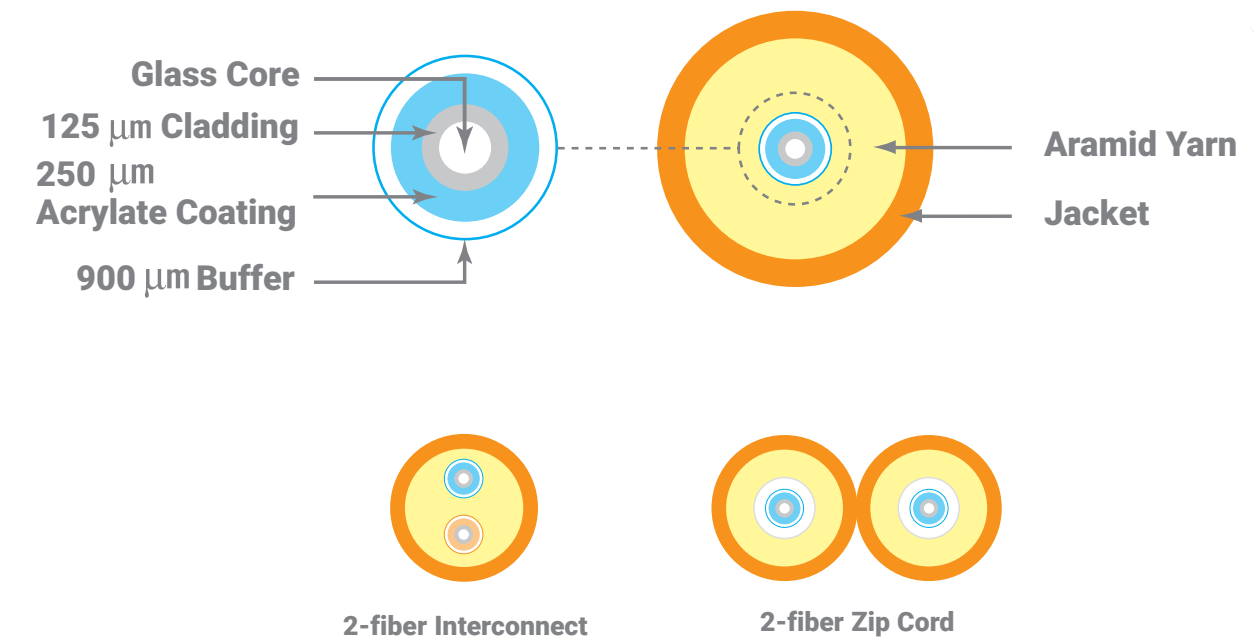


Diagram scale approx. 5:1



Photo is for representation purposes only.

